

PHILIPS

Lighting



MASTERColour CDM-Tm Evolution Mini

MASTERColour CDM-Tm Evolution Mini 35W/930 GU6.5

Highest-efficiency, longest-life CDM-Tm Mini lamp producing crisp white sparkling light with high color rendering

Product data

General Information

Cap-Base	GU6.5 [GU6.5]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 5% Failures (Nom)	16000 h
Life to 10% Failures (Nom)	18000 h
Life to 20% Failures (Nom)	20000 h
Life to 50% Failures (Nom)	25000 h

Light Technical

Color Code	930 [CCT of 3000K]
Luminous Flux (Rated) (Min)	3870 lm
Luminous Flux (Rated) (Nom)	4200 lm
Color Designation	Warm White (WW)
Lumen Maintenance 1000 h (Nom)	93 %
Lumen Maintenance 12000 h (Nom)	77 %
Lumen Maintenance 2000 h (Nom)	90 %
Lumen Maintenance 20000 h	72 %
Lumen Maintenance 4000 h (Nom)	84 %
Chromaticity Coordinate X (Nom)	0.431
Chromaticity Coordinate Y (Nom)	0.390
Correlated Color Temperature (Nom)	3000 K

Luminous Efficacy (Rated) (Nom)	110 lm/W
Color Rendering Index (Min)	87
Color Rendering Index (Nom)	90

Operating and Electrical

Power (Rated) (Nom)	39 W
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	180 s
Voltage (Max)	102 V
Voltage (Min)	92 V
Voltage (Nom)	97 V

Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min

Mechanical and Housing

Bulb Finish	Clear
-------------	-------

Approval and Application

Energy Efficiency Label (EEL)	A+
-------------------------------	----

MASTERCcolour CDM-Tm Evolution Mini


Mercury (Hg) Content (Nom)	4.7 mg
Energy Consumption kWh/1000 h	43 kWh
UV	
Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.4
Luminaire Design Requirements	
Bulb Temperature (Max)	450 °C
Cap-Base Temperature (Max)	250 °C

Product Data	
Full product code	871869640245000
Order product name	MASTERCcolour CDM-Tm Evolution Mini 35W/930 GU6.5
EAN/UPC - Product	8718696402450
Order code	928100205130
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928100205130
Net Weight (Piece)	8.000 g

Warnings and Safety

- Use only in a totally enclosed luminaire, even during testing (IEC61167, IEC62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear
- The vast majority of drivers are fully compatible with CDM Evolution lamps. However, best performance is guaranteed with Philips drivers.
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- CDM Evolution lamps are designed to comply with IEC standards
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing





CDM-Tm Evo Mini 35W/930 GU6.5

Product	D (max)	D	O	L (min)	L (max)	L	C (max)
MASTERCcolour CDM-Tm Evolution Mini 35W/930 GU6.5	13.3 mm	0.5 in	5.2 mm	28 mm	32 mm	30 mm	56.7 mm

MASTERColour CDM-Tm Evolution Mini



Photometric data

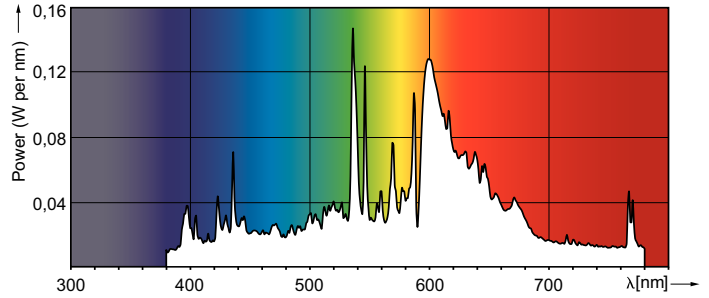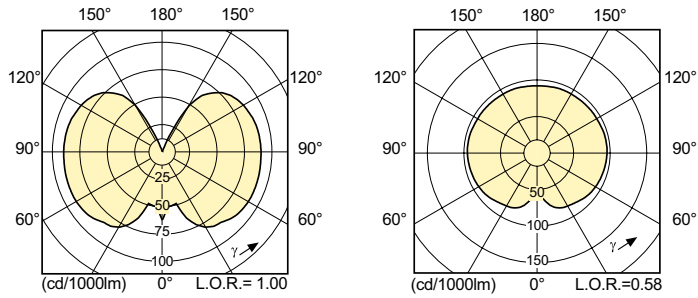

CDM-Tm Evolution Mini 35W /930 GU6.5

CDM-Tm Evolution Mini 35W /930 GU6.5

Lifetime

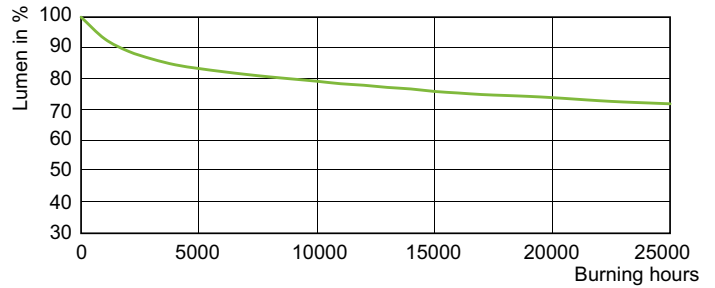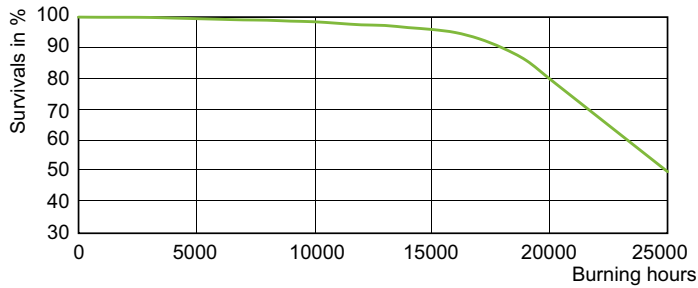

CDM-Tm Evolution Mini 35W Life Expectancy /930 GU6.5

CDM-Tm Evolution Mini 35W Lumen Maintenance /930 GU6.5

