



HI-LITE

APPLICATIONS

Wall units, table lamps, pendant lamps, recessed or surface-mounted downlighters

FEATURES

Advanced cold spot control technology results in high luminous efficiency // Nickel coated copper technology used for lamp bases, this eliminates faulty electrical contact and makes lamp safer // PBT flame-resistance material can withstand high temperature making lamp fire resistance // Tri-band phosphor powder results in high luminous efficiency and emphasize natural color

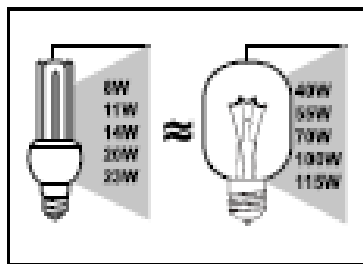

BASE LAMP	POWER	INPUT VOLTAGE	FREQ.	LUMINOUS FLUX	LUMINOUS EFFICACY	COLOR TEMP.	CRI	AVERAGE LIFE	TUBE		LENGTH (L)	DIAMETER (D)
									DIAMETER	SHAPE		
E27	8 W	220~240V	50~60 Hz	465 lm	58 lm/W	2700 K	≥ 80	≥ 8000 h	9 ± 1 mm (T3)	3 U	102 ± 2 mm	42 ± 1 mm
E27	8 W	220~240V	50~60 Hz	450 lm	56 lm/W	6500 K	≥ 80	≥ 8000 h	9 ± 1 mm (T3)	3 U	102 ± 2 mm	42 ± 1 mm
E27	11 W	220~240V	50~60 Hz	640 lm	58 lm/W	2700 K	≥ 80	≥ 8000 h	9 ± 1 mm (T3)	3 U	112 ± 2 mm	42 ± 1 mm
E27	11 W	220~240V	50~60 Hz	620 lm	56 lm/W	6500 K	≥ 80	≥ 8000 h	9 ± 1 mm (T3)	3 U	112 ± 2 mm	42 ± 1 mm
E27	14 W	220~240V	50~60 Hz	840 lm	60 lm/W	2700 K	≥ 80	≥ 8000 h	9 ± 1 mm (T3)	3 U	128 ± 2 mm	42 ± 1 mm
E27	14 W	220~240V	50~60 Hz	810 lm	58 lm/W	6500 K	≥ 80	≥ 8000 h	9 ± 1 mm (T3)	3 U	128 ± 2 mm	42 ± 1 mm
E27	20 W	220~240V	50~60 Hz	1240 lm	62 lm/W	2700 K	≥ 80	≥ 8000 h	12 ± 1 mm (T4)	3 U	154 ± 2 mm	48 ± 1 mm
E27	20 W	220~240V	50~60 Hz	1200 lm	58 lm/W	6500 K	≥ 80	≥ 8000 h	12 ± 1 mm (T4)	3 U	154 ± 2 mm	48 ± 1 mm
E27	23 W	220~240V	50~60 Hz	1470 lm	64 lm/W	2700 K	≥ 80	≥ 8000 h	12 ± 1 mm (T4)	3 U	165 ± 2 mm	48 ± 1 mm
E27	23 W	220~240V	50~60 Hz	1430 lm	62 lm/W	6500 K	≥ 80	≥ 8000 h	12 ± 1 mm (T4)	3 U	165 ± 2 mm	48 ± 1 mm