


# Lembar data produk

## Karakteristik

# PKF16M723

PratiKa wander socket - straight - 16 A - 2P + E -  
200...250 V AC - IP67

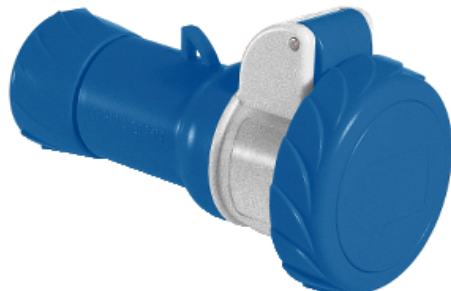

### Main

Range	PratiKa
Product or component type	Wander socket
Device short name	PratiKa screw
Plug, socket category	Low voltage
Poles description	2P + E
Network type	AC
Outlet standard	Industrial

### Complementary

Plug, socket, control station shape	Straight
[In] rated current	16 A
[Ue] rated operational voltage	200...250 V
Network frequency	50/60 Hz
Ground lug clockwise position	6 h
Plug, socket material	Self-extinguishing engineering polymer housing :
Contacts material	Brass sleeves :
Connections - terminals	Captive screws
Cable cross section	1...4 mm <sup>2</sup>
Cable outer diameter	8...15 mm
Cable entry	Cable gland
Thread type	Pg 21
Product weight	0.17 kg
Height	84 mm
Width	84 mm
Depth	142 mm
Colour	Grey ( RAL 7035 )
Voltage colour	Blue

### Environment

Standards	IEC 60309-1 IEC 60309-2
-----------	----------------------------

IP degree of protection	IP67 conforming to IEC 60529
IK degree of protection	IK08 conforming to EN 62262
Fire resistance	850 °C conforming to IEC 60695-2-1
Relative humidity	50 % ( 40 °C ) 70 % ( 30 °C ) 90 % ( 20 °C )
Ambient air temperature for operation	35 °C ( 86400 s ) -25...40 °C

### Contractual warranty

Warranty period	18 months
-----------------	-----------