



# PL-S 2 Pin

## PL-S 9W/840/2P 1CT/25

PL-S is an efficient low-wattage compact fluorescent lamp, typically used for decorative and orientation purposes. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.


#### **Product data**

General Information			
Cap-Base	G23 [ G23]		
Life to 50% Failures (Nom)	8000 h		
Light Technical			
Color Code	840 [ CCT of 4000K] 600 lm		
Luminous Flux (Nom)			
Color Designation	Cool White (CW)		
Lumen Maintenance 2000 h (Nom)	90 %		
Lumen Maintenance 5000 h (Nom)	85 %		
Correlated Color Temperature (Nom)	4000 K 67 lm/W		
Luminous Efficacy (Rated) (Nom)			
Color Rendering Index (Nom)	82		
Operating and Electrical			
Power (Rated) (Nom)	8.6 W		
Lamp Current (Nom)	0.170 A		
Voltage (Nom)	60 V		
Controls and Dimming			
Dimmable	No		

Mashanian and Llausian	
Mechanical and Housing	
Cap-Base Information	2 Pins
Approval and Application	
Energy Efficiency Label (EEL)	В
Mercury (Hg) Content (Nom)	1.4 mg
Product Data	
Full product code	871150070680500
Drder product name	PL-S 9W/840/2P 1CT/25
AN/UPC - Product	8711500706805
Drder code	927901708465
lumerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Naterial Nr. (12NC)	927901708465
Net Weight (Piece)	0.032 kg


## PL-S 2 Pin


## **Dimensional drawing**

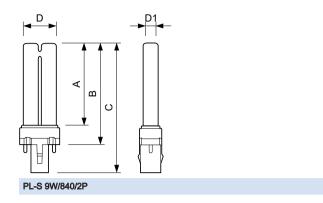

		. ,	C (max)
PL-S 9W/840/2P 1CT/25 27.	.1 mm 1	13 mm	167.5 mm

## Photometric data

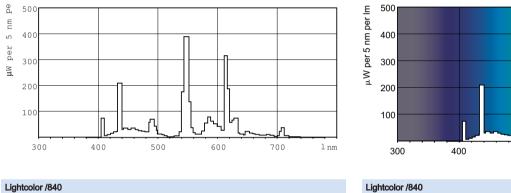

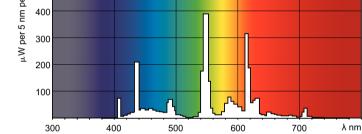

### Lightcolor /840



© 2018 Philips Lighting Holding B.V. All rights reserved. Philips Lighting reserves the right to make changes in specifications and/or to discontinue any product at any timewithout notice or obligation and will not be liable for any consequences resulting from the use of this publication.

www.lighting.philips.com 2018, March 19 - data subject to change