



Plusline Large

Plusline L 1500W R7s 230V 1CT/10

Mains-voltage linear lamp giving white halogen light


Product data

General Information	
Cap-Base	R7S [R7s]
Operating Position	P4 [Parallel +/-4D or Horizontal(HOR)]
Nominal Lifetime (Nom)	2000 h
Switching Cycle	8000X
Light Technical	
Luminous Flux (Nom)	33000 lm
Luminous Flux (Rated) (Nom)	33000 lm
Correlated Color Temperature (Nom)	2900 K
Luminous Efficacy (Rated) (Nom)	22 lm/W
Color Rendering Index (Nom)	100
LLMF at End of Nominal Lifetime (Min)	80 %
Operating and Electrical	
Power (Rated) (Nom)	1500.0 W
Lamp Current (Nom)	6.52 A
Starting Time (Nom)	0.0 s
Warm Up Time to 60% Light (Nom)	instant full light
Power Factor (Nom)	1
Voltage (Nom)	230 V
Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Bulb Finish	Clear
Approval and Application	
Energy Efficiency Label (EEL)	C
Energy Consumption kWh/1000 h	1500 kWh
Luminaire Design Requirements	
Bulb Temperature (Max)	900 °C
Pinch Temperature (Max)	350 °C
Product Data	
Full product code	872790080857500
Order product name	Plusline L 1500W R7s 230V 1CT/10
EAN/UPC - Product	8727900808575
Order code	923932243241
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	923932243241
Net Weight (Piece)	0.020 kg
ILCOS Code	HDG//RS-1500-230-R7s-250,7

Plusline Large

Dimensional drawing

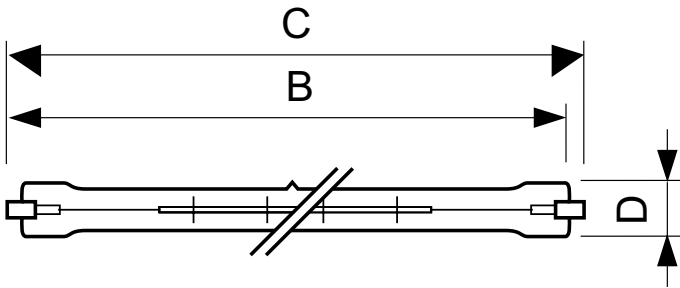

Product	D (max)	B (max)	B	B (min)	C (max)
Plusline L 1500W R7s 230V 1CT/10	11 mm	252.3 mm	250.7 mm	249.1 mm	254.1 mm

DEBig 1500W R7s 230V T11 CL

