



MASTER TL5 High Efficiency

MASTER TL5 HE 28W/865 SLV/40

This TL5 lamp (tube diameter 16 mm) has a high luminous efficacy, resulting in low energy consumption. The High Efficiency TL5 lamp offers excellent lumen maintenance and good color rendering. Application areas are offices, industry, public and governmental buildings, schools, hospitals and indoor sports lighting.

Product data

General Information	
Cap-Base	G5 [G5]
Life to 50% Failures Preheat (Nom)	24000 h
Features	na [Not Applicable]
System Description	High Efficiency
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	99 %
LSF Preheat 6000 h Rated	99 %
LSF Preheat 8000 h Rated	99 %
LSF Preheat 16000 h Rated	97 %
LSF Preheat 20000 h Rated	84 %
Light Technical	
Color Code	865 [CCT of 6500K]
Luminous Flux (Nom)	2700 lm
Luminous Flux (Rated) (Nom)	2500 lm
Color Designation	Cool Daylight
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	97 lm/W
Correlated Color Temperature (Nom)	6500 K
Luminous Efficacy (Rated) (Nom)	90 lm/W

Color Rendering Index (Max)	85
Color Rendering Index (Min)	80
Color Rendering Index (Nom)	82
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %
Operating and Electrical	
Power (Rated) (Nom)	27.9 W
Lamp Current (Nom)	0.170 A
Temperature	
Design Temperature (Nom)	35 °C

Datasheet, 2018, May 18 data subject to change

MASTER TL5 High Efficiency


Controls and Dimming				
Dimmable	Yes			
Mechanical and Housing				
Cap-Base Information	Green Plate			
Approval and Application				
Energy Efficiency Label (EEL)	A+			
Mercury (Hg) Content (Nom)	1.4 mg			
Energy Consumption kWh/1000 h	31 kWh			
Product Data				
Full product code	871150071015455			

Order product name	MASTER TL5 HE 28W/865 SLV/40		
EAN/UPC - Product	8711500710154		
Order code	927926586555		
Numerator - Quantity Per Pack	1		
Numerator - Packs per outer box	40		
Material Nr. (12NC)	927926586555		
Net Weight (Piece)	105.800 g		
ILCOS Code	FDH-28/65/1B-L/P-G5-16/1150		

Warnings and Safety


• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

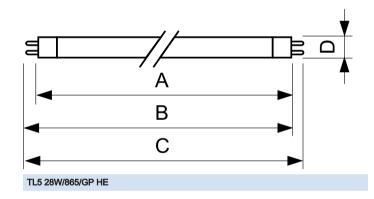

Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HE	17 mm	1149.0 mm	1156.1 mm	1153.7 mm	1163.2 mm
28W/865 SLV/40					

Photometric data

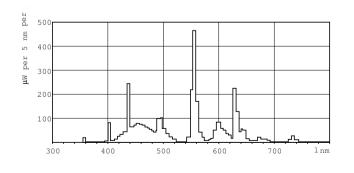

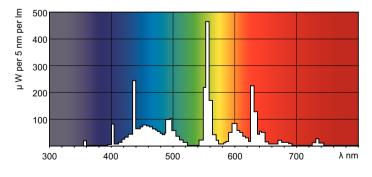



Lightcolor /865

Lightcolor /865

MASTER TL5 High Efficiency


Lifetime

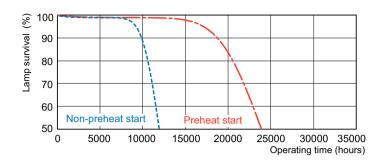



MASTER TL5 HE Life Expectancy 3 h cycle



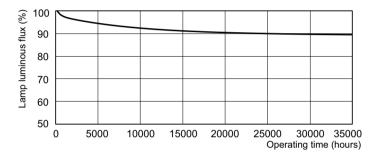

MASTER TL5 HE Lumen Maintenance 3 h + 12 h cycle

