

Honeywell Digital Time Switch

Honeywell Digital Time Switch allows for simple and reliable scheduling of electrical operations. With up to 17 programmable ON/OFF operations available, users may program the Time Switch to automatically switch an appliance (ie. Lighting, Sprinkler, etc.) ON/OFF at a preset time.

Easy and suitable to install whether on surface, flush or even Din Rail mounting, the Time Switch provides major convenience in automated switching.



Front view



Rear view

Part Number	Description
HWTHC711A	Digital Time Switch

Product Features:

- Suitable for Surface, Flush or Din Rail mounting
- 17 programmable ON/ OFF settings for output control
- 16A dry relay-contact output
- Clear LCD display screen with backlight
- Retains programmed settings up to 60 days during mains power loss
- Ni-MH battery as backup power
- Allow programs to be reset to initial factory setting


Product Dimensions:



Product Specification:

- Dimension: 72mm x 72mm x 42mm
- Voltage ratings: 220–240 VAC
- Frequency: 50/60Hz
- Output Dry Contact load capacity: 16A @ 250 VAC (Resistive)
- Accuracy: Typical $\pm 1s/day$ at 20°C
- Power consumption: $\leq 2W$
- Terminal Capacity: 1 x 2.5mm² (solid or stranded) cable
- Minimum interval: 1 minute
- Weight: approx. 110g
- Standby Battery power: 60 days
- DIN rail connection type: Flat DIN 6.3mm

Product Components:

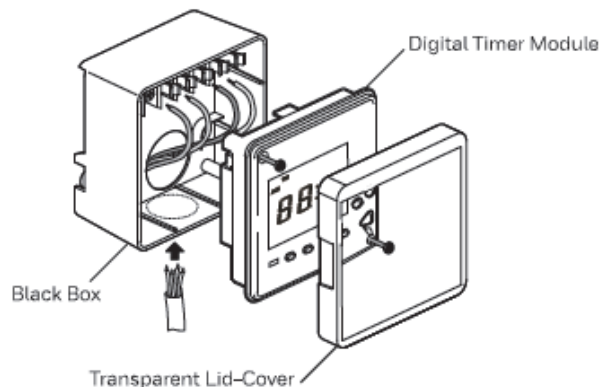

Honeywell Digital Time Switch

For simple & timely convenience

Honeywell